

# GE Triton™ Dishwashers



## GSD5900GWW

White on white

- TriClean™ wash system
- Electronic controls
- QuietPower™ II Plus sound package
- Pots & Pans cycle
- Normal Wash cycle
- China/Crystal cycle
- Piranha™ Hard Food Disposer
- Super upper rack
- Super lower rack
- Super capacity silverware basket
- Accessory basket

## GSD5900GCC

Bisque on bisque (not shown)

## GSD5900GBB

Black on black (not shown)

## GSD5960GSS

Stainless Steel (not shown)

GE	
GSD5960GSS GSD5900GWW GSD5900GCC GSD5900GBB	

Features	
Wash system	TriClean™
Dual pumps and motors	●
Wash levels	3
Water filtration	100% Triple
Hard food disposer	Piranha™
Cycles	Variable††
Sani Wash <sup>1</sup>	●
Pots & Pans	●
Normal Wash	●
China/Crystal	●
Speed Wash	●
Rinse only	●
Options	
Delay Start option	2/4/8-hour
Speed Dry	●
Power Pre Soak	●
Child lock option	●
Racks, shelf & basket	
Upper rack	Super
Lower rack	Super
Fold down tine flexibility	2 sets lower
Utility shelves	2 upper w/StemSafe
Accessory basket	●
Silverware basket	Super capacity w/2 cell covers
Control type	Electronic
Cycle progress indicators	6 LED's
Touchpads	11
Rinse aid dispenser	w/Indicator
Center throw door latch	●

### Power Cord Installation

#### Instructions:

The power cord and connections must comply with the National Electrical Code, section 422 and/or local codes and ordinances. The cord must be no longer than 6 ft. from the junction box to the receptacle.

### Warranty Information

1, 2, 5, 10-year warranty package: Full one-year warranty on entire dishwasher.

Limited second-year water distribution parts warranty.

Limited fifth-year electronic control module.

Full ten-year parts, tub/ door liner warranty.

See written warranty for details.

See written warranty for details.

See written warranty for details.

### Electrical Rating

Voltage AC .....120

Hertz .....60

Total connected

load amperage .....8.2

Calrod® heater watts .....725

For use on adequately wired

120-volt, 15-amp circuit having


2-wire service with a separate

ground wire.

This appliance must be grounded

for safe operation.


### Installation Information (in inches)

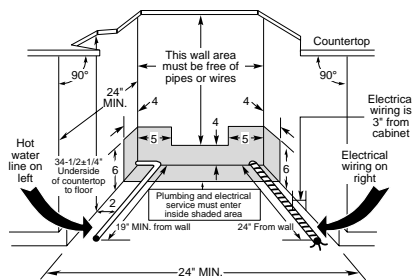

### Dishwasher Rough-In Information

**Note:** Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

### Wood Insert Cut-Out Dimensions

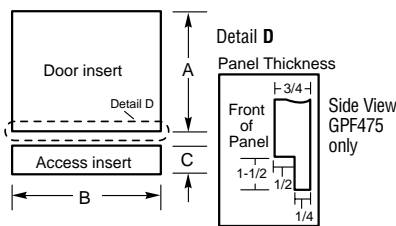

Kit	A	B	C	D - Panel Thickness
GPF425	19-3/4"	23-9/16"	3-11/16"	1/4"
GPF475	19-7/8"	23-5/8**	4-1/4* to 3-11/16**	3/4"

\*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel.

\*\*Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

### Dishwasher Panel Kits:

GSD5900 Series

GPF410W/C/B—panel kit

(door and access)

Note: W = White, C = Bisque,

B = Black

### Wood Panel Capability:

GPF475—3/4" trimless panel kit

(door and access [GPF100—

heavy-duty spring kit included])

GPF425W/C/B—1/4" panel trim

kit (door and access)

GPF100—Optional heavy door

spring kit

Quiet	
Quiet	
Sound insulation package	QuietPower™ II Plus
Active Vent system	●
PermaTuf™ tub and door liner	●
QuietPower motor	●

### Appearance

Colors available††† SS, WW, CC, BB

Color panels—door & access Trimless

### Weights & Dimensions

Approx. shipping weight (lbs.) 80

Height w/legs retracted (in.) 34

Overall width (in.) 24

Overall depth (in.) 25-3/4

### Accessories

Requires kit for 1/4" panel capability with trim

GPF425W/C/B

Requires kit for trimless 3/4" panel capability

GPF475


All GE dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

† Certified by National Sanitation Foundation

†† Sensor controlled

††† SS=Stainless steel, WW=White on white, CC=Bisque on bisque, BB=Black on black

### Dimensions (in inches)

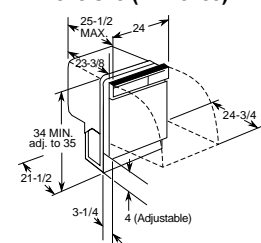

**GE Appliances**