

MULTI-LOAD DRYERS

TRADITIONAL LINE – OPL: 120 LB AND 170 LB



MICROPROCESSOR CONTROLS

- Gives end users the option to select the ideal cycle for individual wash and dry needs
- Easy-to-read diagnostics help to quickly identify an issue, locate it, and get the machine back into service



RADIAL AIRFLOW SYSTEM

- Provides fast moisture removal to help dry large loads and bulky items
- High BTU burners and airflow burners



OWNER-PROGRAMMABLE THREE-PHASE REVERSING CYLINDER

- Helps separate fabrics to promote effective dry cycles, helping to reduce tangling and wrinkles



BUILT TO LAST

- Heavy-Duty Motor – handles large loads with ease
- Sealed Bearings – never need lubrication
- Large-Capacity Lint Compartment - helps dry clothes evenly by allowing more airflow to pass through



NON VEND
MDG170PJW pictured

NON VEND
MDG120PJW pictured

MULTI-LOAD DRYERS – TRADITIONAL LINE		
CAPACITY	MODEL NUMBER	COLOR
120 lb	MDG120PJW	White
170 lb	MDG170PJW	White



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.


®/™ © 2020 Maytag. All rights reserved.
MY200034 12/22

MULTI-LOAD DRYERS

TRADITIONAL LINE – OPL: 120 LB AND 170 LB



GAS MULTI-LOAD DRYERS 208V-240V / 60 HZ / 3 PHASE

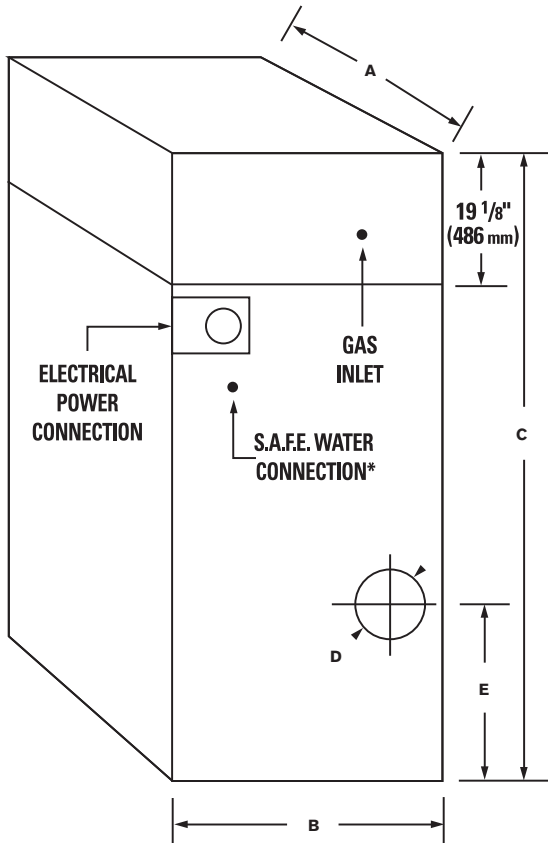

*S.A.F.E. water pressure requires 40 psi ± 20 psi. Requires 1/2" (12.7 mm) water hose connection.

MODEL	MDG120 (PJ)	MDG170 (PJ)
CAPACITY		
Number of Dryer Pockets	1	1
Cylinder Volume Each Pocket — cu. ft. (liters)	38.18 (1,081)	51.20 (1,450)
Cylinder Diameter Each Pocket — in. (mm)	44.62 (1,083)	51.50 (1,308)
Cylinder Depth Each Pocket — in. (mm)	42.12 (1,070)	42.5 (1,080)
Dry Load Capacity Each Pocket — lb (kg)	120 (54)	170 (77)
GAS SPECS/AIRFLOW		
Drive Motor Size — hp (kW)	3/4 (.56)	1 (.75)
Blower Motor Size — hp (kW)	3 (2.24)	7.5 (5.60)
Airflow Type	Radial	Radial
Airflow — cfm (cmm)	2,150 (60.88)	3,700 (104.77)
Gas Inlet Size — in. (mm)	1 (25.4) F.N.P.T.	1.5 (38.10) F.N.P.T.
Heat Input, Gas — btu/hr (kcal/hr)	375,000 (94,500)	550,000 (138,598)
Number of Exhausts	1	1
(D) Exhaust Duct Diameter — in. (mm)	14 (356)	18 (457)
ELECTRICAL REQUIREMENTS		
Break Fuse - Amps	20	40
DIMENSIONS		
(A) Depth — in. (mm)	62.50 (1,588)	62.50 (1,588)
(B) Width — in. (mm)	48.75 (1,238)	55.88 (1,419)
(C) Height — in. (mm)	86.88 (2,207)	100 (2,540)
Door Opening — in. (mm)	31.38 (797)	31.38 (797)
(E) Height to Center of Exhaust — in. (mm)	9.5 (241)	19.25 (489)
APPROXIMATE WEIGHT		
Uncrated — lb (kg)	1,349 (612)	2,103 (954)
Crated — lb (kg)	1,489 (675)	2,269 (1,029)
CONTROL/USER INTERFACE		
Control Type	Microprocessor	Microprocessor
Display Type	Digital	Digital
Vended Controller	No	No
OPL Controller	Microprocessor	Microprocessor
CONSTRUCTION		
Cylinder	Galvanized Steel	Galvanized Steel
Top	Painted CRS	Painted CRS
Front	White	White
Sides	Painted CRS	Painted CRS



Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.