

## SPECIFICATIONS

# MLE/MLG27PD - EXPORT

## SINGLE-LOAD STACK DRYER

MICROPROCESSOR COIN READY



**At 7.4 cu. ft. per dryer, this stack option provides double the drying capability while taking up the room of only a single unit.**

### AT A GLANCE:

- Extra-Large 7.4 cu. ft. capacity
- Available in 50Hz only
- Card reader compatible\*/non-coin
- Easy-to-use one-touch cycle selection

### DESIGNED FOR EFFICIENCY:

- Turbovent® technology
- Easy-to-use diagnostics

### BUILT TO LAST:

- Four-roller suspension with permanently lubricated bearings
- Metal pulley on motor
- Sealed bearing
- Heavy-duty steel cabinet
- 5-Year Limited Parts Warranty – All Parts Covered\*\*

**AMERICA**  
AN AMERICAN COMPANY FOR OVER 100 YEARS

\*Card readers are not supplied or sold by Whirlpool Corporation and must be purchased separately. \*\*Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for complete warranty details.

# SPECIFICATIONS




# MLE/MLG27PD - EXPORT

## SINGLE-LOAD STACK DRYER

MICROPROCESSOR COIN READY

### MAYTAG® COMMERCIAL SINGLE-LOAD SUPER-CAPACITY STACK DRYER MICROPROCESSOR COIN-DROP

DRYER SPECIFICATIONS	
<b>MODEL</b>	MLE/MLG27PDCGW
<b>MOTOR</b>	
Single-phase, thermoprotected against overload, auto-reset	▪
HP (kw)	1/3 (.33)
<b>CAPACITY</b>	
Cu. ft. (liters)	7.4 (209.5)
<b>AIRFLOW—cfm (cmm)</b>	
Export, Gas/Electric models—per pocket	230 (6.5)/215 (6.1)
<b>TUMBLE SPEED</b>	
RPM	50 ± 1.5
<b>SOUND LEVEL (export model only)</b>	
Sound pressure level, Lpa (dBA) (Kpa: ± 10dBA)	58
<b>HEATER ELEMENT RATING—watts</b>	
Export models—per pocket	4,600
<b>EXHAUST DUCT DIAMETER</b>	
In. (mm)	4 (101.6)
<b>ELECTRONIC BURNER IGNITION</b>	
MLG models	▪
<b>GAS INLET</b>	
MLG models—in.	3/8 N.P.T.
<b>AUTOMATIC PRESSURE REGULATOR</b>	
MLG models	▪
<b>ADJUSTABLE LEVELING LEGS</b>	▪
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg)	294 (133.4)
Uncrated—lbs. (kg)	272 (123.4)
<b>DIMENSIONS</b>	
Width—in. (mm)	27 (686)
Depth—in. (mm)	29 (737)
Height—in. (mm)	76.75 (1,950)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice. *208-Volt electrical element kit available.	

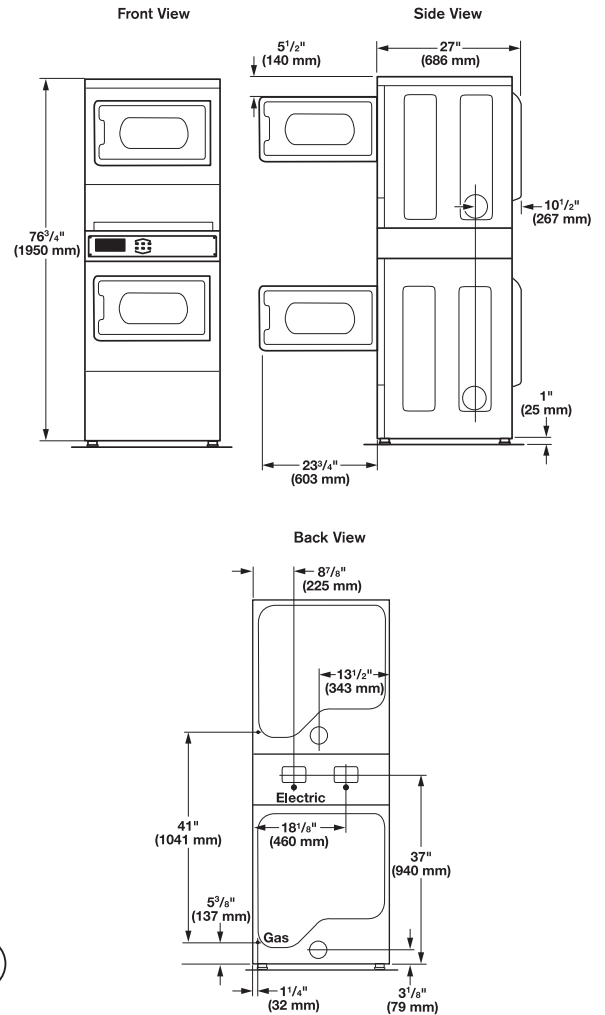

#### MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	135 ft. (41.2 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.3 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28.0 m)



\*Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for complete warranty details.